


CAUTION: Adhesive bonds on contact. Please read entire instructions first.

To install the SpotLink-5:

- Insert the five hex-bolts into plate A (see diagram). Place steel pin through washer and insert pin into plate B. Bring plate A and B together and thread on the five nuts finger-tight.

Important: *The above process must be completed before attaching anchor to equipment.*

- Select the best location on your equipment to mount the SpotLink-5. The anchor requires a flat surface area free of ridges, screws, labels or access panels.
- Place the equipment so that the mounting surface is on top and horizontal. Place the anchor in position to assure a proper fit. Clean the mounting surface.
- Apply a liberal bead of adhesive to the upper surface of plate A spiraling out from the center. Adhesive is moisture activated so it may be helpful to lightly blow on wet adhesive. Use enough adhesive so that when the anchor is pressed into place, its mounting surface will become completely covered with adhesive.
- Press the anchor assembly against the equipment case without twisting and hold firmly for 30 seconds. It is normal for some adhesive to ooze out the sides. Wipe away any excess adhesive with a tissue.
- Adhesive sets in seconds and anchor cannot be removed or adjusted. Allow several hours to fully set. Maximum bond is achieved after 24 hours.
- To secure peripheral devices to the SpotLink-5 using SecurTech security cables (sold separately), remove the five nuts and separate the two plates. Insert the cable loops into the anchor's horseshoe-shaped slots. Replace the plate and tighten the screws.
- Adhere the four rubber feet to the bottom corners of your equipment case using a small amount of adhesive.
- Select the desired location for your equipment on the desk or bench. Mark and drill a 5/8" hole where the steel pin will be located. Put the equipment in place with the steel pin through the hole. Place a washer over the steel pin and lock the padlock shackle through the hole in the pin to secure the system.

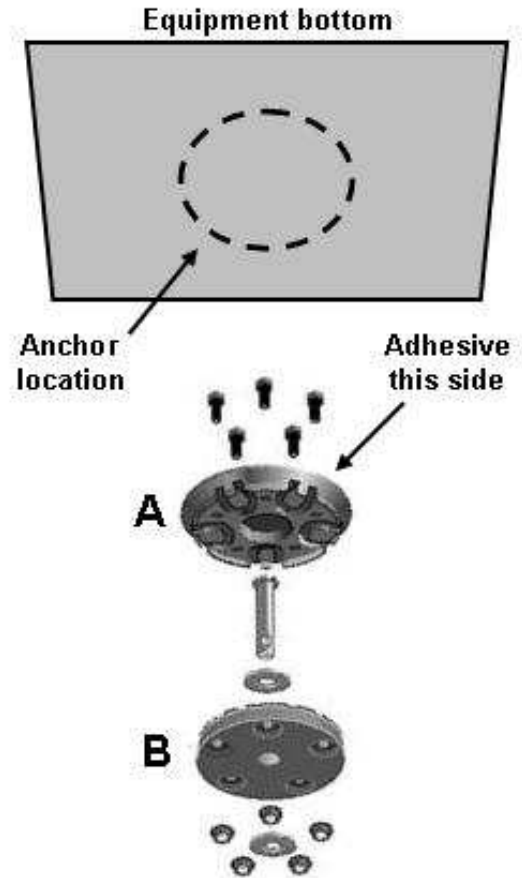

CAUTION: Avoid getting adhesive on skin, in eyes or on clothes. Keep out of the reach of children. Use with care.

Thank you for choosing SecurTech